

96115629 – Light Harness Repair Kit

Overview

Sno-Way's 96115629 Light Harness Repair Kit replaces one damaged harness in one plow light. This kit contains (1) Instruction sheet, (1) Replacement harness, and (1) seal.

Note:

- It is recommended that you read through this manual completely before performing any work.
- The headlight can remain attached to the plow when replacing the harness.

Tools Required


- (1) Small Phillips Screwdriver
- (1) Large Phillips Screwdriver

Installation Instructions

1. Use the Small Screwdriver to remove the screw from the back panel of the plow light.



2. Remove the back panel

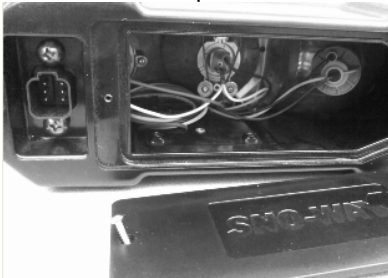


3. Use the Large Screwdriver to remove the (2) screws securing the light harness plug in place.



4. Push the light harness plug into the light housing then bring out from the back panel opening. Also remove the seal from around the 6 pin light harness plug.



5. Disconnect the (2) 3 pin connectors.

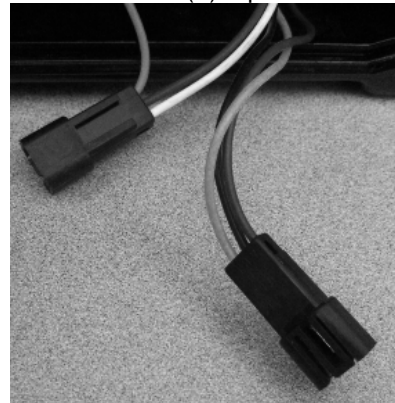


6. Remove the replacement harness from the kit and slide the seal onto the 6 pin connector with the grooved side facing the screw holes in the connector.



Note: Colors of the replacement harness may not match the original damaged harness.

7. Plug the 3 pin female connector with the YELLOW, BLACK, & GREEN wires into the 3 pin male connector leading to the turn signal bulb.
8. Plug the 3 pin female connector with the RED, BLUE, & WHITE wires into the 3 pin male connector leading to the High/Low Beam bulbs

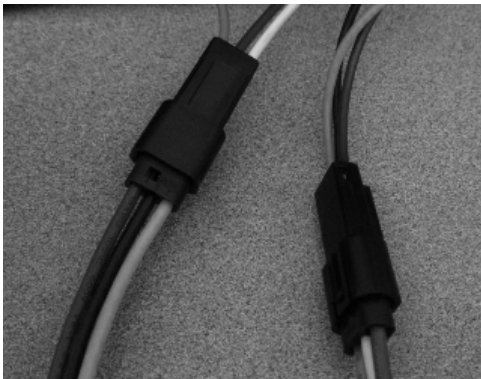

9. Reverse steps 1 -4 to reassemble the light.